


Part No.	(5)Length	Part No.	(5)Length
3180A-1	1M	3180A-10	10M
3180A-2	2M	3180A-15	15M
3180A-3	3M	3180A-20	20M
3180A-5	5M		

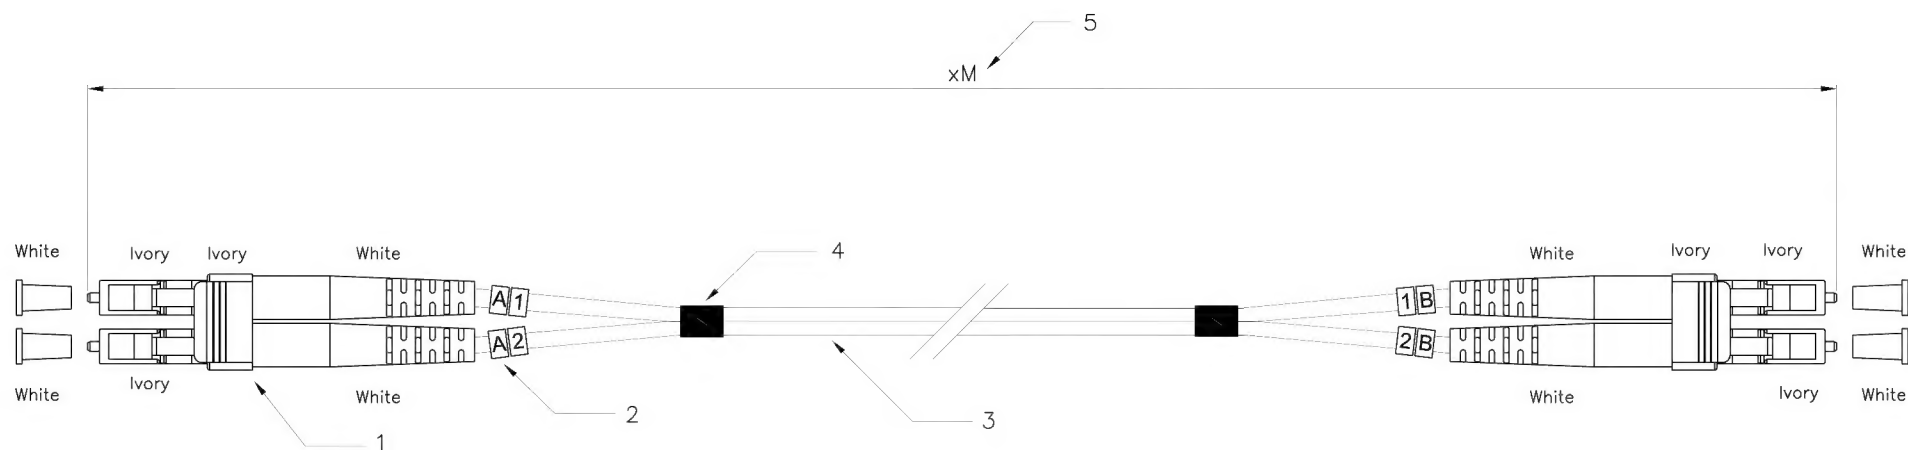


## Specification :

1. Connector Type : LC/PC Multimode.
2. Cable Marker.
3. Cable Type :
  - 3-1 Zipcord cable,  $\phi 3.0\text{mm}$ , 50/125um Multimode.
  - 3-2 Cable Jacket : Orange color, LSZH material.
4. Shrink Tube.
5. Length : xM.

## Performance :

- a. Insertion Loss :  $< 0.5 \text{ dB}$ .
- b. Fiber Extention :  $-0.05\text{um} < H < +0.05\text{um}$ .
- c. Ferrule End-face Radius :  $7 < R < 25\text{mm}$ .
- d. Apex Offset :  $< 50\text{um}$ .
- e. Increase in insertion loss after 500 mating :  $0.2 \text{ dB Max}$ .
- f. Operation Temperature :  $-20^\circ\text{C}$  to  $+70^\circ\text{C}$ .
- g. Storage Temperature :  $-40^\circ\text{C}$  to  $+80^\circ\text{C}$ .

RoHS Compliant

	DSGN	CSQ	31.MAY.2007	ITEM NO: 3180A
	CHK	Maer	31.MAY.2007	
	UNIT M/M	APPR	Yty	31.MAY.2007
SCALE 1/1	<div>Videk Ltd</div>			
DWG NO: 3180A				